

DP30HCIE




LONGREACH
EQUIPMENT



High-flow pressure pump. Ideal for high-head transfer and small scale irrigation projects.

- Heavy-duty construction
- Cast iron pump
- Powerful, high-torque electric start diesel engine
- High-quality Japanese bearings in engine
- Long-range fuel tank
- Dependable and economical
- 1 year full factory warranty
- Full spare parts available.

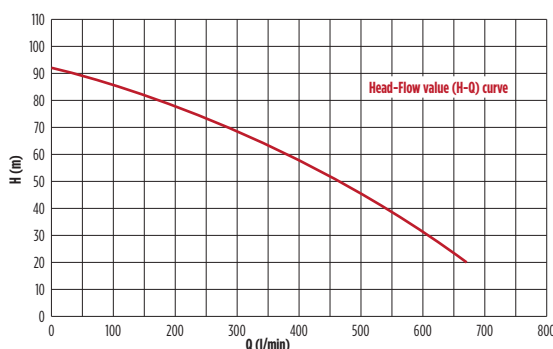

Item	Unit	Value									
Flow value (Q)	L/min	0	113.33	180.00	286.67	380.00	466.67	543.33	613.33	670.00	
	m ³ /h	0	6.8	10.8	17.2	22.8	28	32.6	36.8	40.2	
Head (H)	m	92	85	80	70	60	50	40	30	20	

Water Pump – Cast iron construction					Engine					Standard Features				Dimensions		
Suction discharge port diameter [mm (in)]	Cont. head (m)	Self-priming time (s/4m)	Max. suction head (m)	Cont. flow	Speed (rpm)	Type	Displacement (cc)	Bore x stroke (mm)	Starting system	Fuel tank capacity (L)	Suction and Delivery Camlock Fittings	Foot Valve	Tool Kit	Roll Frame	Dimensions (LxWxH) (mm)	Gross Weight
80 (3) 80 (3)	92	30	8	47,000	3600	Single cylinder, vertical, 4-stroke air-cooled diesel	498 14 hp	92 x 75	Recoil and electric	12.5	YES	YES	YES	YES	540 x 485 x 615	82

PRICE