

DP60E




LONGREACH
EQUIPMENT



High-flow transfer pump for medium head application.

- Heavy-duty construction
- Cast iron impeller
- Powerful, high-torque electric start diesel engine
- High-quality Japanese bearings in engine
- Long-range fuel tank
- Dependable and economical
- 1 year full factory warranty
- Full spare parts available.

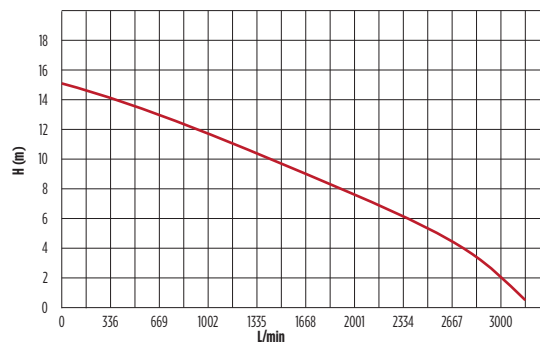

Item	Unit	Value									
Flow value (Q)	L/min	0	336	669	1002	1335	1668	2001	2334	2667	3000
	m³/h	0	202	401	601	801	100	120	140	160	180
Head (H)	m	16	14	12	10	8	6	4	2	1	0

Water Pump – Cast iron impeller					Engine						Standard Features				Dimensions	
Suction discharge port diameter [mm (in.)]	Cont. head (m)	Self-priming time (s/4m)	Max. suction head (m)	Cont. flow	Speed (rpm)	Type	Displacement (cc)	Bore x stroke (mm)	Starting system	Fuel tank capacity (L)	Suction and Delivery Camlock Fittings	Foot Valve	Tool Kit	Roll Frame	Dimensions (LxWxH) (mm)	Gross Weight
150 150	15	400	6	180,000	3600	Single cylinder, vertical, 4-stroke air-cooled diesel	498 10 hp	95 x 75	Recoil Electric	25	YES	YES	YES	YES	850 x 600 x 1020	110

PRICE

\$3,575.00
incl GST