



DP15HE



LONGREACH
EQUIPMENT



- High-pressure pump for small water transfer and fire fighting applications
- Heavy-duty construction
- Powerful and economical electric-start diesel engine
- Recoil start back-up with decompressor
- Best quality Japanese bearing used in construction
- 1 year warranty
- Full spare parts available.

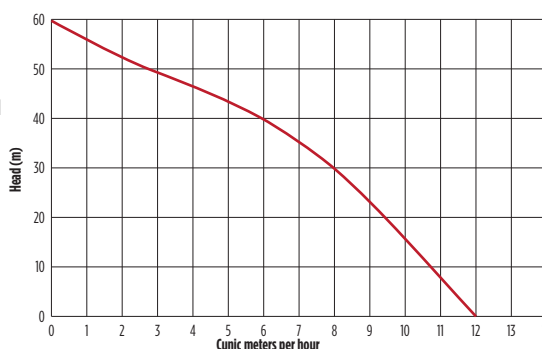

Item	Unit	Value						
Flow value (Q)	L/min	0	47	100	133	157	178	200
	m ³ /h	0	2.8	6.0	8.0	9.4	10.7	12
Head (H)	m	60	50	40	30	20	10	0

Water Pump – Aluminium construction					Engine					Standard Features				Dimensions		
Suction discharge port diameter [mm (in)]	Cont. head (m)	Self-priming time (s/4m)	Max. suction head (m)	Cont. flow	Speed (rpm)	Type	Displacement (cc)	Bore x stroke (mm)	Starting system	Fuel tank capacity (L)	Suction and Delivery Camlock Fittings	Strainer	Tool Kit	Roll Frame	Dimensions (LxWxH) (mm)	Gross Weight
40 (1.5) 40 (1.5)	60	30	7	12,000	3600	Single cylinder, vertical, 4-stroke air-cooled diesel	296	78 x 62	Recoil and electric	3.5	YES	YES	YES	YES	550 x 455 x 665	40

PRICE