

DP40E




LONGREACH
EQUIPMENT



High-flow transfer pump for medium head application.

- Heavy-duty construction
- Cast iron impeller
- Powerful, high-torque electric start diesel engine
- High-quality Japanese bearings in engine
- Long-range fuel tank
- Dependable and economical
- 1 year full factory warranty
- Full spare parts available.

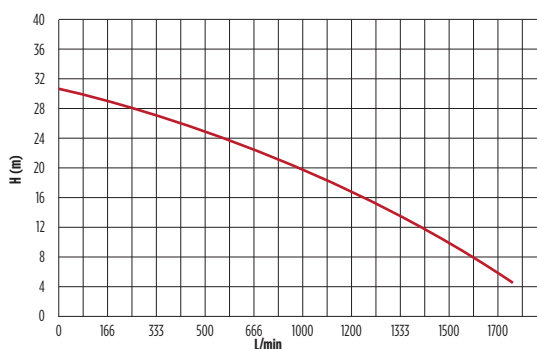

Item	Unit	Value											
Flow value (Q)	L/min	0	166	333	500	666	1000	1200	1333	1500	1700	1900	
	m³/h	0	10	20	30	40	60	72	80	90	102	120	
Head (H)	m	0	29	28	25	22	20	17	14	10	6	2	

Water Pump – Cast iron impeller					Engine						Standard Features				Dimensions	
Suction discharge port diameter [mm (in)]	Cont. head (m)	Self-priming time (s/4m)	Max. suction head (m)	Cont. flow	Speed (rpm)	Type	Displacement (cc)	Bore x stroke (mm)	Starting system	Fuel tank capacity (L)	Suction and Delivery Camlock Fittings	Foot Valve	Tool Kit	Roll Frame	Dimensions (LxWxH) (mm)	Gross Weight
100 (4) 100 (4)	31	180	8	120,000	3600	Single cylinder, vertical, 4-stroke air-cooled diesel	418 10 hp	86 x 72	Recoil and electric	12.5	YES	YES	YES	YES	655 x 485 x 620	68

PRICE

\$2,255.00
incl GST